




东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

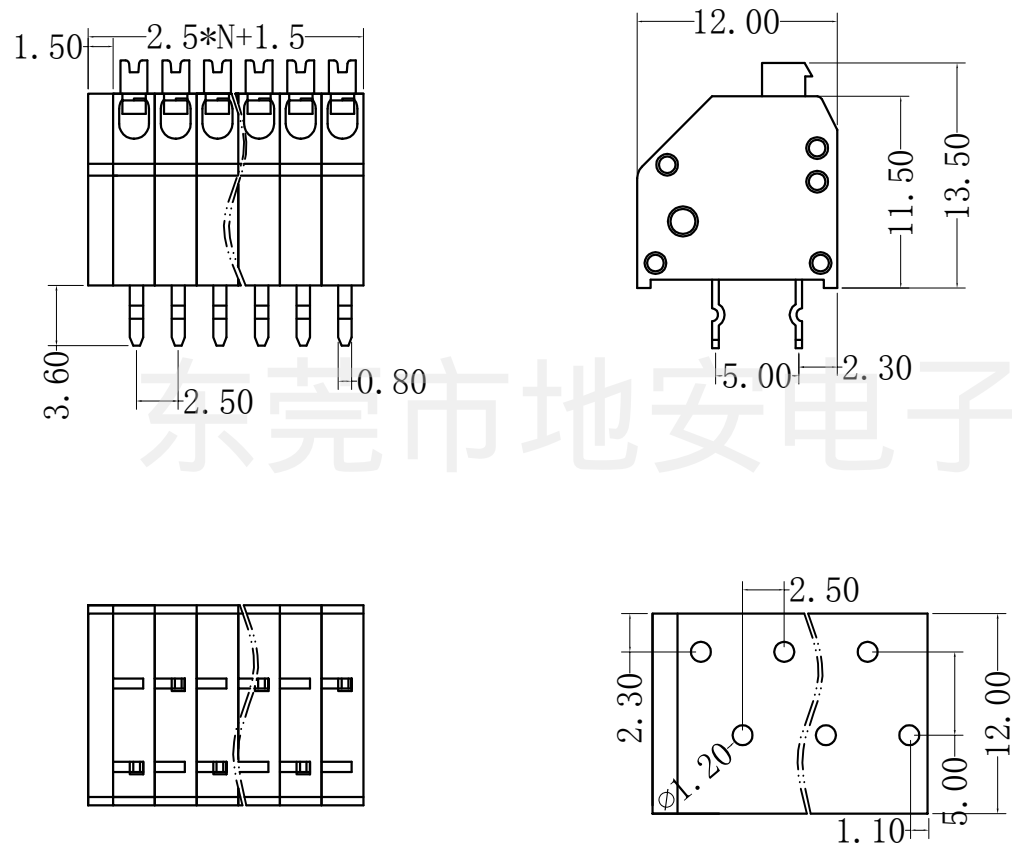

项目/参数/认证	GCC	TUV	CE	UL	VDE
额定电压(Rated Voltage) [V]	150	150	150	150	
额定电流(Rated Current) [A]	6	6	6	5	
额定线经平方(Wire Range mm ²)	0.2-0.5	0.2-0.5	0.2-0.5	0.2-0.5	
额定线经线号(Wire Range AWG)	24-20	24-20	24-20	24-20	
冲击电压 Impulse withstand voltage	1.5 (KV)				
剥线长度(Stripping Length) [mm]	10-11 (mm)				
绝缘材料(Insulation Material)	PA66 UL94V-0				
导体材料(Contactor Material)	磷铜 (Phosphor Copper)				
导体表面镀层(Contactive Coating)	镀锡 (Dumb tin)				
间距(Pitch) [mm]	2.5/5.0				
级数(Poles) [P]	2-32P				
工作温度(Operating temperatur) [°C]	-40°C ~ +105°C				
焊锡温度(Soldering temperature) [°C]	250°C/5S				

linear dimension (Tolerances Standard GB/T 14486-2008)							—	∕	⊥	
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to 160	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	名称/TITLE	版本/REV	V
东莞市地安电子科技有限公司							DA250-2.5		