





REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

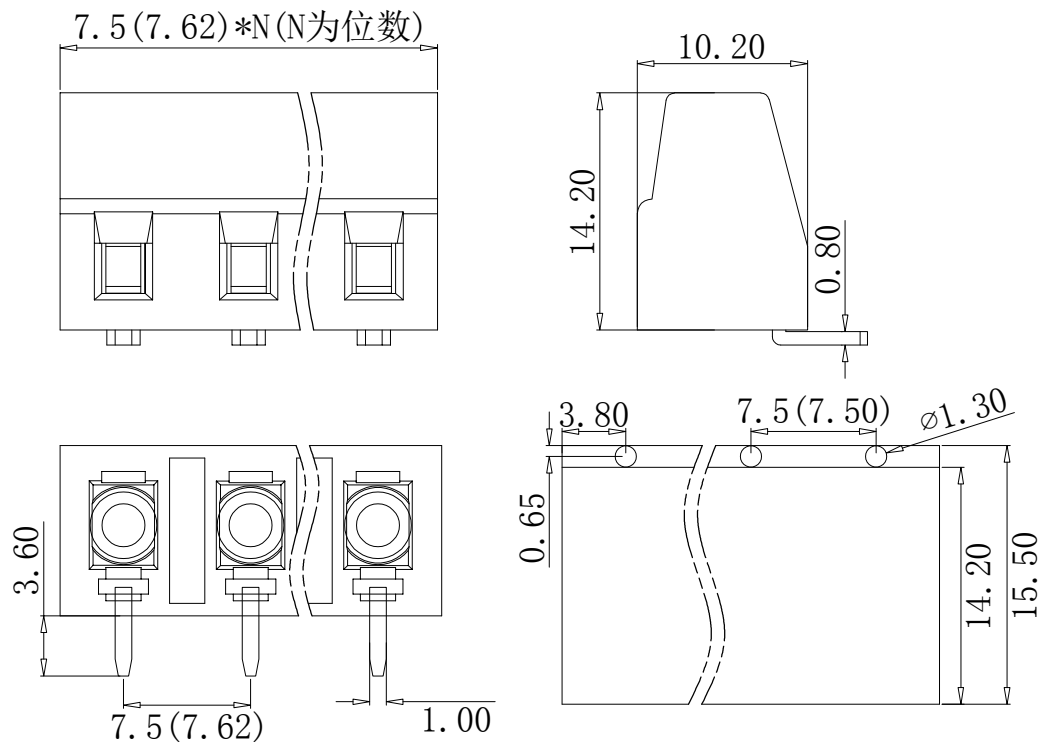

项目/参数/认证			
额定电压(Rated Voltage) [V]	300	300	300
额定电流(Rated Current) [A]	16	20	16
额定线经平方(Wire Range) [mm ²]	0.2-4.0	0.2-4.0	0.2-2.5
额定线经线号(Wire Range) [AWG]	24-12	24-12	24-14
冲击电压 (Impulse withstand voltage)	4 (KV)		
剥线长度(Stripping Length) [mm]	6-7 (mm)		
螺丝/扭矩(Screw Torque Max)	M3.0/0.5 (N.m)		
绝缘材料(Insulation Material)	PA66 UL94V-0		
导体材料(Contactor Material)	黄铜 (Brass)		
导体表面镀层(Contactive Coating)	镀锡 (Dumb tin)		
间距(Pitch) [mm]	7.5/7.62		
级数(Poles) [P]	2-24P		
工作温度(Operating temperatur) [°C]	-40°C ~ +105°C		
焊锡温度(Soldering temperature) [°C]	250°C/5S		

linear dimension (Tolerances Standard GB/T 14486-2008)								—		
variable range		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
	to 6	to 10	to 30	to 60	to 100	to 160	to 10	to 100	to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION		版本/REV	VO
东莞市地安电子科技有限公司									
						名称/TITLE	DA128R-7.5/7.62		