



东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD




REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE



项目/参数/认证	
额定电压 (Rated Voltage) [V]	300
额定电流 (Rated Current) [A]	10
额定线经平方 (Wire Range) [mm²]	0.2-1.5
额定线经线号 (Wire Range) [AWG]	24-16
冲击电压 (Impulse withstand voltage)	2.5 (KV)
剥线长度 (Stripping Length) [mm]	8-9 (mm)
绝缘材料 (Insulation Material)	PA46 UL94V-0
导体材料 (Contactor Material)	黄铜 (brass)
导体表面镀层 (Contactive Coating)	镀锡 (Dumb tin)
间距 (Pitch) [mm]	3.5
级数 (Poles) [P]	2-32P
工作温度 (Operating temperatur) [°C]	-40°C ~ +105°C
焊锡温度 (Soldering temperature) [°C]	250°C / 5S

3.50*N+0.7 (N为位数)

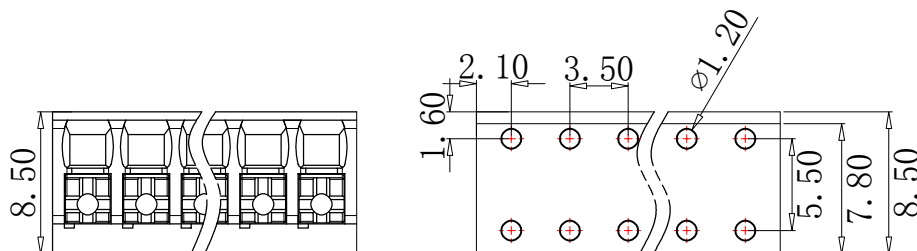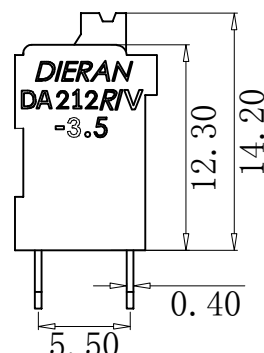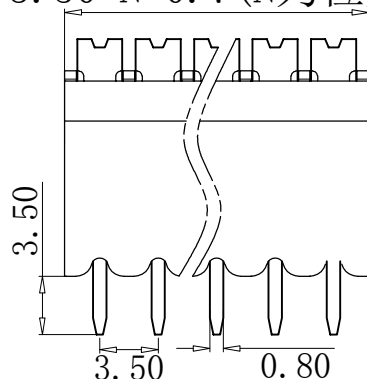

linear dimension (Tolerances Standard GB/T 14486-2008)

— □ ⊥

variable range		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
	to 6	to 10	to 30	to 60	to 100	to 160		to 10	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	V0
东莞市地安电子科技有限公司						名称/TITLE	DA212V-3.5	