

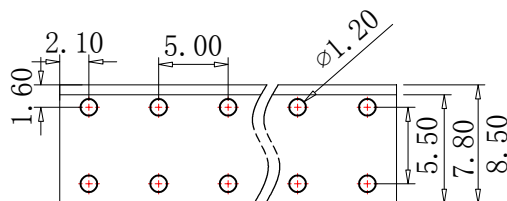
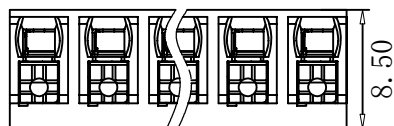




东莞市地安电子科技有限公司  
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

| REV. | DESCRIPTION | ECN NO. | APPROVED | DATE |
|------|-------------|---------|----------|------|
|      |             |         |          |      |
|      |             |         |          |      |
|      |             |         |          |      |
|      |             |         |          |      |

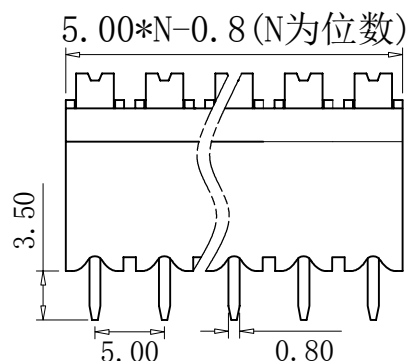

项目/参数/认证



额定电压 (Rated Voltage) [V]

300

额定电流 (Rated Current) [A]

10

额定线经平方 (Wire Range) [mm<sup>2</sup>]

0.2-1.5

额定线经线号 (Wire Range) [AWG]

24-16

冲击电压 (Impulse withstand voltage)

4 (KV)

剥线长度 (Stripping Length) [mm]

8-9 (mm)

绝缘材料 (Insulation Material)

PA46 UL94V-0

导体材料 (Contactor Material)

黄铜 (brass)

导体表面镀层 (Contactive Coating)

镀锡 (Dumb tin)

间距 (Pitch) [mm]

5.0

级数 (Poles) [P]

2-32P

工作温度 (Operating temperatur) [°C]

-40°C ~ +105°C

焊锡温度 (Soldering temperature) [°C]

250°C / 5S

linear dimension (Tolerances Standard GB/T 14486-2008)

— □ ⊥

| variable<br>range | to<br>6 | over<br>6 | over<br>10 | over<br>30 | over<br>60 | over<br>100 | over<br>160 | tolerance               |                           |      |
|-------------------|---------|-----------|------------|------------|------------|-------------|-------------|-------------------------|---------------------------|------|
|                   |         | to<br>10  | to<br>30   | to<br>60   | to<br>100  | to<br>160   | to<br>10    | over<br>10<br>to<br>100 | over<br>100<br>to<br>1000 |      |
| tolerance         | ±0.20   | ±0.30     | ±0.50      | ±0.70      | ±1.00      | ±1.30       | ±1.60       | 0.10                    | 0.30                      | 0.60 |

|               |    |         |    |          |     |                             |            |    |
|---------------|----|---------|----|----------|-----|-----------------------------|------------|----|
| 单位/UNITS      | mm | 尺寸/SIZE | A4 | 比例/SCALE | 1:1 | 第三视角/THIRD ANGLE PROJECTION | 版本/REV     | V0 |
| 东莞市地安电子科技有限公司 |    |         |    |          |     | 名称/TITLE                    | DA212V-5.0 |    |