

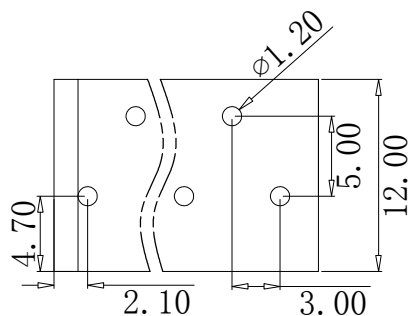
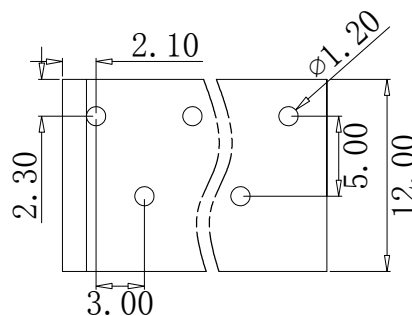


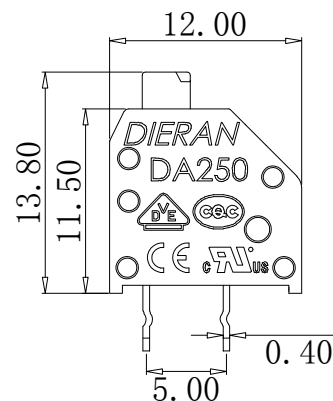

东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

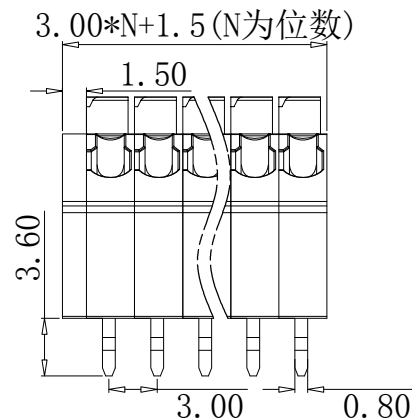

项目/参数/认证



额定电压 (Rated Voltage) [V]

300 450 450 300 250

额定电流 (Rated Current) [A]

6 9 9 6 6

额定线经平方 (Wire Range) [mm²]

0.2-1.5 0.2-0.75 0.2-0.75 0.2-1.5 0.2-0.75

额定线经线号 (Wire Range) [AWG]

24-16 24-18 24-18 24-16 24-18

冲击电压 (Impulse withstand voltage)

2.5 (KV)

剥线长度 (Stripping Length) [mm]

10-11 (mm)

绝缘材料 (Insulation Material)

PA66 UL94V-0

导体材料 (Contactor Material)

磷铜 (Phosphor Copper)

导体表面镀层 (Contactive Coating)

镀锡 (Dumb tin)

间距 (Pitch) [mm]

3.0

级数 (Poles) [P]

2-32P

工作温度 (Operating temperatur) [°C]

-40°C ~ +105°C

焊锡温度 (Soldering temperature) [°C]

250°C / 5S

linear dimension (Tolerances Standard GB/T 14486-2008)

— $\square$ $\perp$

variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	± 0.20	± 0.30	± 0.50	± 0.70	± 1.00	± 1.30	± 1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	名称/TITLE	版本/REV	V0
东莞市地安电子科技有限公司							DA250-3.0 正/反		