

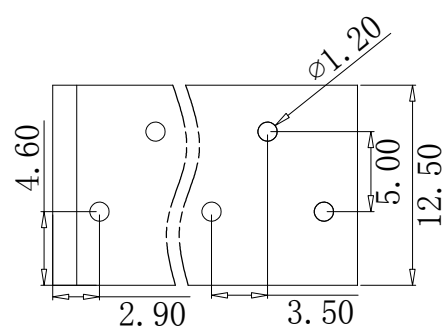
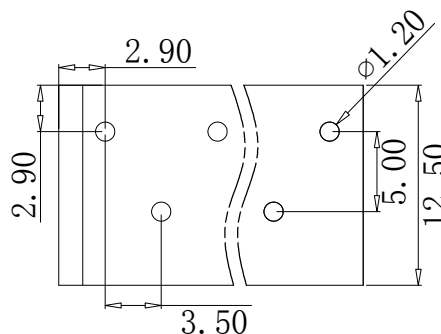




东莞市地安电子科技有限公司  
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

| REV. | DESCRIPTION | ECN NO. | APPROVED | DATE |
|------|-------------|---------|----------|------|
|      |             |         |          |      |
|      |             |         |          |      |
|      |             |         |          |      |
|      |             |         |          |      |

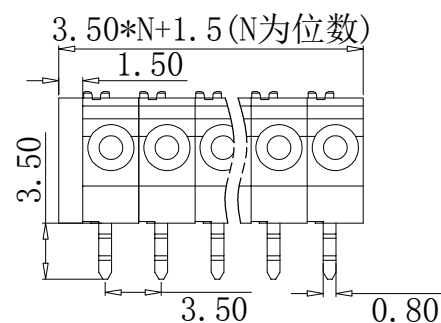

|                                   |                      |          |          |          |
|-----------------------------------|----------------------|----------|----------|----------|
| 项目/参数/认证                          |                      |          |          |          |
| 额定电压 (Rated Voltage) [V]          | 250                  | 250      | 250      | 300      |
| 额定电流 (Rated Current) [A]          | 9                    | 9        | 9        | 7        |
| 额定线经平方 (Wire Range) [mm²]         | 0.2-0.75             | 0.2-0.75 | 0.2-0.75 | 0.2-0.75 |
| 额定线经线号 (Wire Range) [AWG]         | 24-18                | 24-18    | 24-18    | 24-18    |
| 冲击电压 (Impulse withstand voltage)  | 2.5 (KV)             |          |          |          |
| 剥线长度 (Stripping Length) [mm]      | 9-10 (mm)            |          |          |          |
| 绝缘材料 (Insulation Material)        | PA66 UL94V-0         |          |          |          |
| 导体材料 (Contactor Material)         | 磷铜 (Phosphor Copper) |          |          |          |
| 导体表面镀层 (Contactive Coating)       | 镀锡 (Dumb tin)        |          |          |          |
| 间距 (Pitch) [mm]                   | 3.5                  |          |          |          |
| 级数 (Poles) [P]                    | 2-32P                |          |          |          |
| 工作温度 (Operating temperatur) [°C]  | -40°C ~ +105°C       |          |          |          |
| 焊锡温度 (Soldering temperature) [°C] | 250°C / 5S           |          |          |          |

| linear dimension (Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —     | □              | ⊥           |
|--------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| variable range                                         | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
| tolerance                                              | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30           | 0.60        |

|               |    |         |    |          |     |                             |                       |        |    |
|---------------|----|---------|----|----------|-----|-----------------------------|-----------------------|--------|----|
| 单位/UNITS      | mm | 尺寸/SIZE | A4 | 比例/SCALE | 1:1 | 第三视角/THIRD ANGLE PROJECTION | 名称/TITLE              | 版本/REV | V0 |
| 东莞市地安电子科技有限公司 |    |         |    |          |     |                             | DA250-3-3.5低按钮<br>正/反 |        |    |