

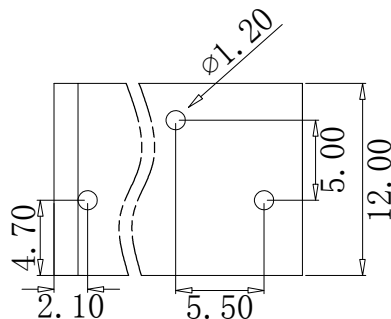
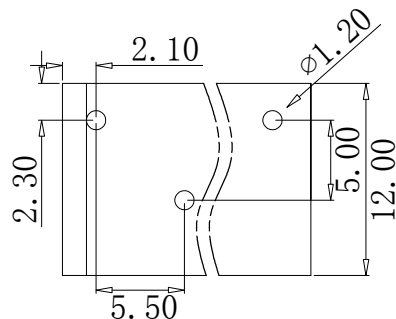


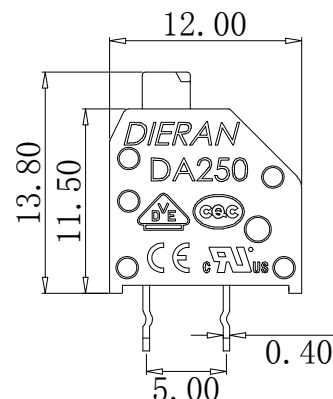

东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

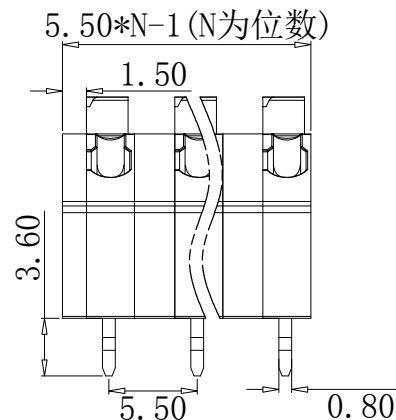

项目/参数/认证



额定电压 (Rated Voltage) [V]

300 450 450 300 250

额定电流 (Rated Current) [A]

6 9 9 6 6

额定线经平方 (Wire Range) [mm²]

0.2-1.5 0.2-0.75 0.2-0.75 0.2-1.5 0.2-0.75

额定线经线号 (Wire Range) [AWG]

24-16 24-18 24-18 24-16 24-18

冲击电压 (Impulse withstand voltage)

2.5 (KV)

剥线长度 (Stripping Length) [mm]

10-11 (mm)

绝缘材料 (Insulation Material)

PA66 UL94V-0

导体材料 (Contactor Material)

磷铜 (Phosphor Copper)

导体表面镀层 (Contactive Coating)

镀锡 (Dumb tin)

间距 (Pitch) [mm]

5.5

级数 (Poles) [P]

2-32P

工作温度 (Operating temperatur) [°C]

-40°C ~ +105°C

焊锡温度 (Soldering temperature) [°C]

250°C /5S

linear dimension (Tolerances Standard GB/T 14486-2008)

— $\square$ $\perp$

variable range	to 6	over 6	over 10	over 30	over 60	over 100	over 160	tolerance		
		to 10	to 30	to 60	to 100	to 160	to 10	over 10 to 100	over 100 to 1000	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	名称/TITLE	版本/REV	V0
东莞市地安电子科技有限公司							DA250-5.5 正/反		