




东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

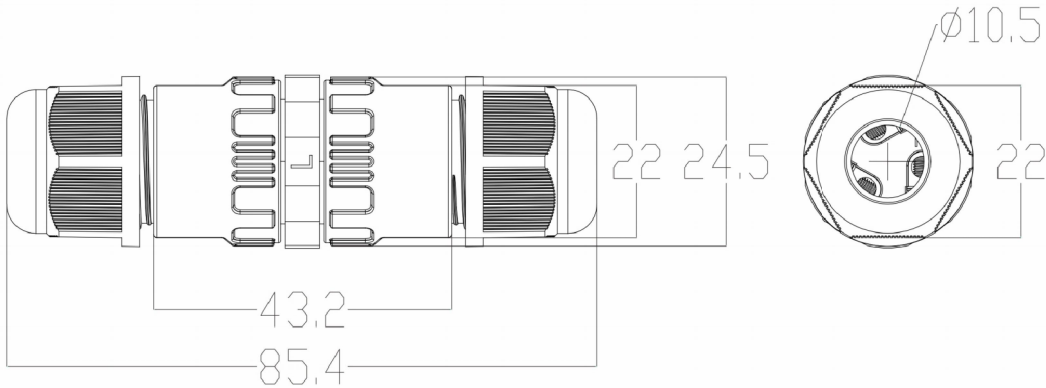

项目/参数/认证	
额定电压 (Rated Voltage) [V]	450
额定电流 (Rated Current) [A]	24
额定线经平方 (Wire Range) [mm ²]	2.5 (Max)
额定线经线号 (Wire Range) [AWG]	14 (Max)
导体材料 (Contactor Material)	铜 (Copper)
绝缘材料 (Insulation Material)	PA66
橡胶组件 (Rubber Part)	硅橡胶 (Silicone Rubber) / 三元乙丙橡胶 (EPDM)
芯数 (Pole)	2-3
绝缘电阻 (Rubber Part)	100 Mohms Min
防护等级 (IP Protection)	IP67/IP68
适用线缆外径范围 (Cable Od Range)	6-10 (mm)
工作温度 (Operating temperatur) [°C]	-40°C ~ +125°C

linear dimension (Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	V0
东莞市地安电子科技有限公司						名称/TITLE	M20 (锁螺丝)	