

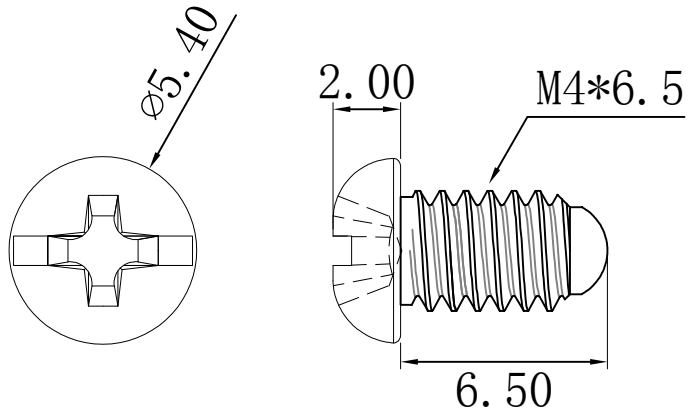
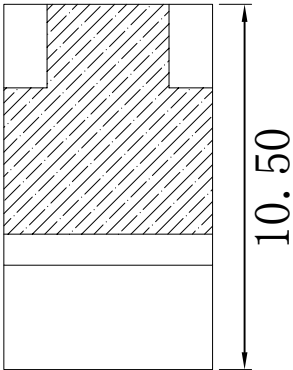


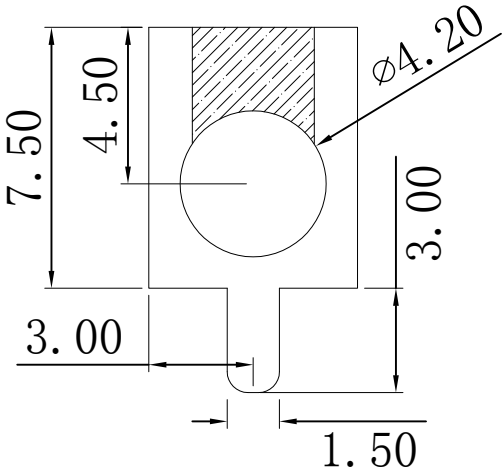

东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

项目 (Item)	
导体材料 (Contactor Material)	铜 (Copper)
螺丝材料 (Screw Material)	钢 (Steel)
螺丝/扭矩 (Screw Torque Max)	M4.0/1.2 (N.m)
导体表面镀层 (Contactive Coating)	镀镍/镀锡 (Ni plating/Dumb tin)
焊锡温度 (Soldering temperature) [°C]	250°C/5S

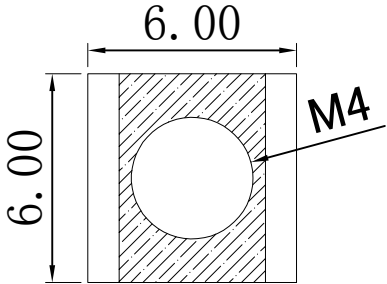

linear dimension (Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	V0
东莞市地安电子科技有限公司						名称/TITLE	6*6*10.5单脚	