



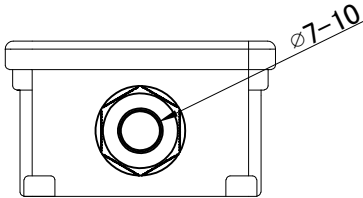

东莞市地安电子科技有限公司  
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

| REVISION RECORD |             |         |          |      |
|-----------------|-------------|---------|----------|------|
| REV.            | DESCRIPTION | ECN NO. | APPROVED | DATE |
|                 |             |         |          |      |
|                 |             |         |          |      |
|                 |             |         |          |      |
|                 |             |         |          |      |

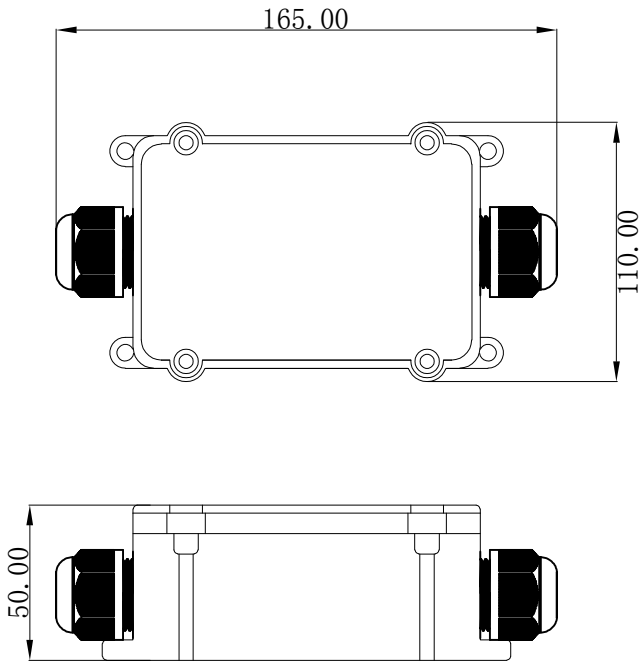

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| 项目/参数/认证                               |                                          |
| 额定电压 (Rated Voltage) [V]               | 450                                      |
| 额定电流 (Rated Current) [A]               | 32                                       |
| 额定线经平方 (Wire Range) [mm <sup>2</sup> ] | 4.0 (Max)                                |
| 额定线经线号 (Wire Range) [AWG]              | 12 (Max)                                 |
| 导体 (Contactor)                         | 接线端子 (Terminal Block)                    |
| 绝缘材料 (Insulation Material)             | PA66                                     |
| 橡胶组件 (Rubber Part)                     | 硅橡胶 (Silicone Rubber) /<br>三元乙丙橡胶 (EPDM) |
| 芯数 (Pole)                              | 2-3                                      |
| 绝缘电阻 (Rubber Part)                     | 100 Mohms Min                            |
| 防护等级 (IP Protection)                   | IP67/IP68                                |
| 适用线缆外径范围 (Cable Od Range)              | 6-10 (mm)                                |
| 工作温度 (Operating temperatur) [°C]       | -40°C ~ +105°C                           |

| linear dimension (Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —     | ∇              | ⊥           |
|--------------------------------------------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| variable range                                         | to    | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
| tolerance                                              | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30           | 0.60        |

|               |    |         |    |          |     |                             |           |    |
|---------------|----|---------|----|----------|-----|-----------------------------|-----------|----|
| 单位/UNITS      | mm | 尺寸/SIZE | A4 | 比例/SCALE | 1:1 | 第三视角/THIRD ANGLE PROJECTION | 版本/REV    | V0 |
| 东莞市地安电子科技有限公司 |    |         |    |          |     | 名称/TITLE                    | DA101L-2T |    |